

# Technical Information Bulletin


## CHOICE LED Lamps



Date: \_\_\_\_\_ Name of distributor: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_ Client #: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_ Name of end user: \_\_\_\_\_

### ORDERING INFORMATION

Order code: 67970  
 Description: A19/S2/9W/40K/ND/CHOICE/STD 4P  
 UPC: 69549679702  
 Case quantity: 24 x 4 pack

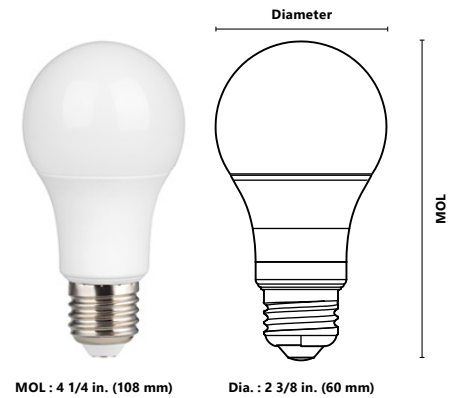

### PERFORMANCE DATA

Shape: A19 4 pack  
 Base: E26  
 Watts(W): 9  
 Volts (VAC): 120  
 Colour temperature (K)\*\*: 4 000  
 Life L70 (hrs): 15 000  
 Initial lumens (lm)\*: 800  
 Initial lumens per watt (lm/W): 89  
 CRI: 80  
 Beam angle: 180  
 Power factor: 0.6  
 Operating temperature range: - 30 °C / - 22 °F to 40 °C / 104 °F

\*Initial lumens range: +/- 10 %      \*\*Typical colour temperature range: +/- 5 %



*This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.*

### CAUTIONS

- Turn power off before inspection, installation, or removal.
- Not suitable for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- NON-Dimmable
- Operating temperature: -20°C / -4°F to 40 °C / 104 °F.
- 2 Years Limited Warranty.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.