

OCTRON® VIVID VALUE ECOLOGIC®

Fluorescent Lamps

OCTRON VIVID VALUE ECOLOGIC T8 lamps provide exceptional color rendering with a 90 CRI for color critical applications and outstanding value for the price oriented end-user. Available in a wide range of color temperatures, these lamps have a rated lamp life of up to 22,500 hours on instant start and up to 27,000 hours on programmed start ballasts at 12 hours per start.

Benefits and Features

- High CRI for color critical applications
- TCLP compliant
- Lead-free glass
- Compatible with electronic ballasts



Product Offering

Lamp Type	Wattage	Color Temperature
F032	32	3500K, 4100K, 5000K

ECOLOGIC® is a comprehensive program focused on addressing environmental issues at all stages of lamp life.

*Regulations may vary. Check your local and state regulations.



This light source meets restrictions on hazardous substances consistent with CA AB1109.



Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	

Ordering Guide

FO	32	/	V	35	/	ECO
Fluorescent OCTRON	Wattage: 32 watts		V=VIVID VALUE	35 = 3500K CCT, 41 = 4100K CCT, 50 = 5000K CCT, 65 = 6500K CCT		ECOLOGIC


Ordering Information

Item Number	Ordering Abbreviation	Nominal Length	Base	Lamp Shape	Average Rated Life				Initial Lumens	Mean Lumens ¹	CCT	CRI
					Instant Start		Prog. Rapid Start					
					3 hrs/ start	12 hrs/ start	3 hrs/ start	12 hrs/ start				
22437	FO32/V35/ECO	48	Medium Bi-Pin	T8	18,000	22,500	22,500	27,000	2450	2250	3500K	90
22438	FO32/V41/ECO	48	Medium Bi-Pin	T8	18,000	22,500	22,500	27,000	2450	2250	4100K	90
22439	FO32/V50/ECO	48	Medium Bi-Pin	T8	18,000	22,500	22,500	27,000	2450	2250	5000K	90
22440	FO32/V65/ECO	48	Medium Bi-Pin	T8	18,000	22,500	22,500	27,000	2400	2210	6500K	90

1. Mean Lumens measured at 40% of rated life.


Technical Information

Typical Fluorescent Lamp Mortality

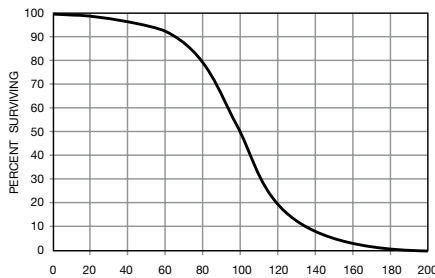

Lamp Dimensions

	(A) Max. Overall Length (in.)	(B) Base Face to Opposite Pin (in.)	(C) Max. Base Face to Base Face (in.)	(D) Max. Outside Diameter (in.)
FO32	47.78"	Min. 47.70" Max. 47.50"	47.22"	1.1"



Sample Specification

Lamp(s) shall be an OCTRON® VIVID VALUE ECOLOGIC® lamp(s) (FO32/VXX) having medium bi-pin base. Lamp(s) shall be designed to pass the Federal TCLP test in force at the time of manufacture. Lamp(s) shall have a correlated color temperature of (3500K, 4100K, 5000K or 6500K) and a CRI of (90). The OCTRON lamp(s) shall be operated on electronic instant start or programmed rapid start ballast(s).

Application Information

1. OCTRON lamps should be operated only with magnetic rapid start ballasts designed to operate 265 mA, T-8 lamps or high frequency (electronic) ballasts that are either instant start, rapid start or programmed rapid start specifically designed to operate T8 lamps. OCTRON lamps may be operated on instant start or programmed rapid start ballasts with ballast factors ranging from a minimum of 0.71 to a maximum of 1.20 at the nominal ballast input voltage (see ballast specs for details). When OCTRON lamps are operated in the instant start mode, the two contacts (bi-pin lamps) of each rapid start lampholder/socket should be connected to each other or use "shunted" "Circle I" lampholders/sockets for instant start bi-pin lamps. Always disconnect power before servicing/installation and wire per the ballast schematics and National Electric Code.
2. Lamps starting down to -20°F (dependent on ballast).
3. Operation below 50°F may affect lumen output or lamp operation.
4. For cold temperature applications, use in enclosed fixture or use tube guards to maximize lamp performance.
5. For rapid start operation, check with ballast manufacturer for ground plane requirement.
6. For maximum energy savings, operate on electronic instant start ballast.

LEDVANCE LLC
181 Ballardvale Street, Suite 203
Wilmington, MA 01887 USA
Phone 1-800-LIGHTBULB (1-800-544-4828)
www.ledvanceUS.com

SYLVANIA and LEDVANCE are registered trademarks.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.



SCAN TO FOLLOW US
ON SOCIAL MEDIA

